
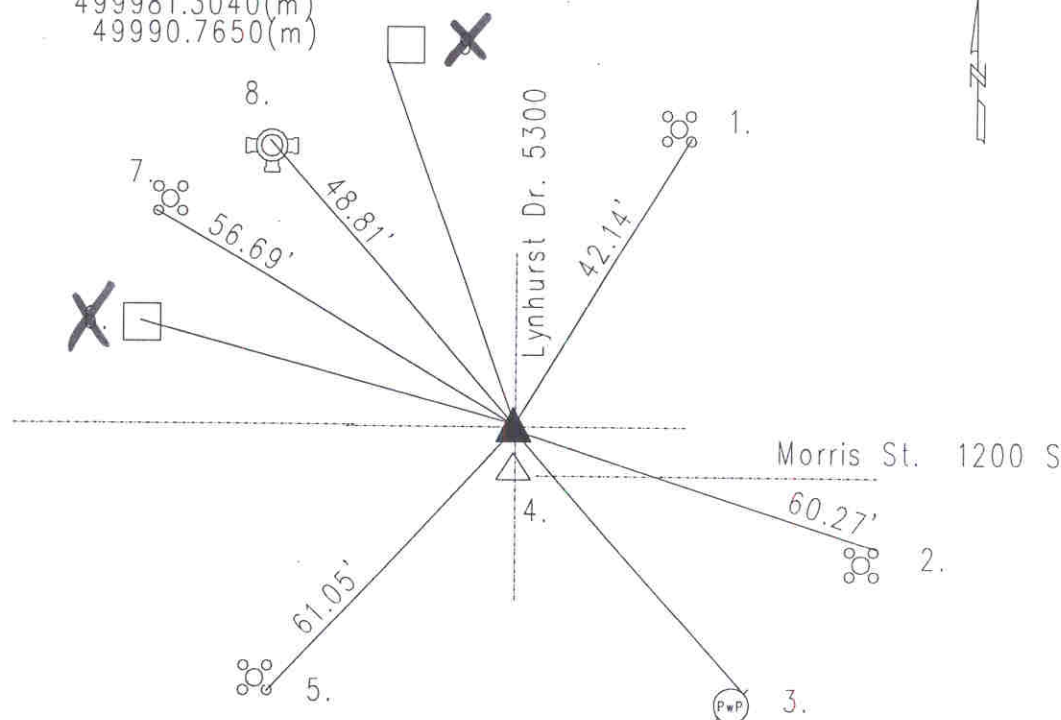


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 13 TOWNSHIP 15 RANGE 2  
DATE: -8-4-99- 6-29-04  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 2-21-99

IN. S.P.C. E ZONE, NAD 83  
NAME: 15021303  
N: 499981.3040(m)  
E: 49990.7650(m)

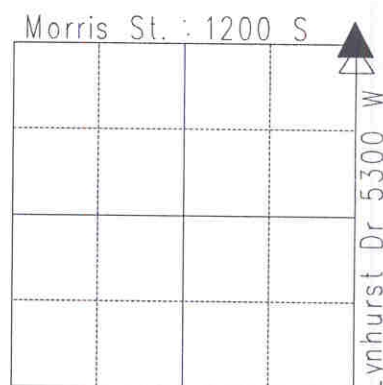

Original post set 1829 by Wm. B. Laughlin with witnesses: 8" hickory S 27 E 14 links, 20" walnut N 37 W 17 links per Marion County Atlas pg. 2. Survey by Percy Hosbrook 2-1849 indicates one walnut stump and plainly marked thence S 40 W 40.49 chains per Wayne Township Legal Survey Book pg. 2. D.B. Hosbrook 5-6-1851 indicates a large rock set w/no witnesses, per Wayne Township Legal Survey Book pg. 29. Monroe 10-3-60 called a cut 'x' in concrete. Schmidt 9-18-61 called a cut cross in concrete. Schmidt 4-27-62 called the same. MCSO 1-3-64 called the same. McLand 3-17-75 called the same. Greene 8-5-86 called the same. Wilcoxon 11-3-94 called a PK nail w/washer. Wilcoxon 2-21-99 called the same. Excavated 8-3-99 by Wilcoxon and cut 'x' in concrete was found 15" down as per old ties. Harrison set. Re-tied 8-4-99 by Wilcoxon.

HC521303

REF.	DISTANCE	DESCRIPTION
1.	42.14'	Cut 'x' SE-bolt of street light pole base
2.	60.27'	Cut 'x' NE-bolt of street light pole base
3.	44.43',	Road nail NE PwP no# 15" up
4.	5.54'	Due S to NW corner of 18-15-3 (Road nail w/washer)
5.	61.05'	Cut 'x' SE-bolt of street light pole base
X	<del>50.91'</del>	<del>Top of concrete gas marker</del>
7.	56.69'	Cut 'x' SW-bolt of street light pole base
8.	48.81'	Top nut of fire hydrant
X	<del>53.63'</del>	<del>Cut 'x' in concrete slab of old sign base</del>